


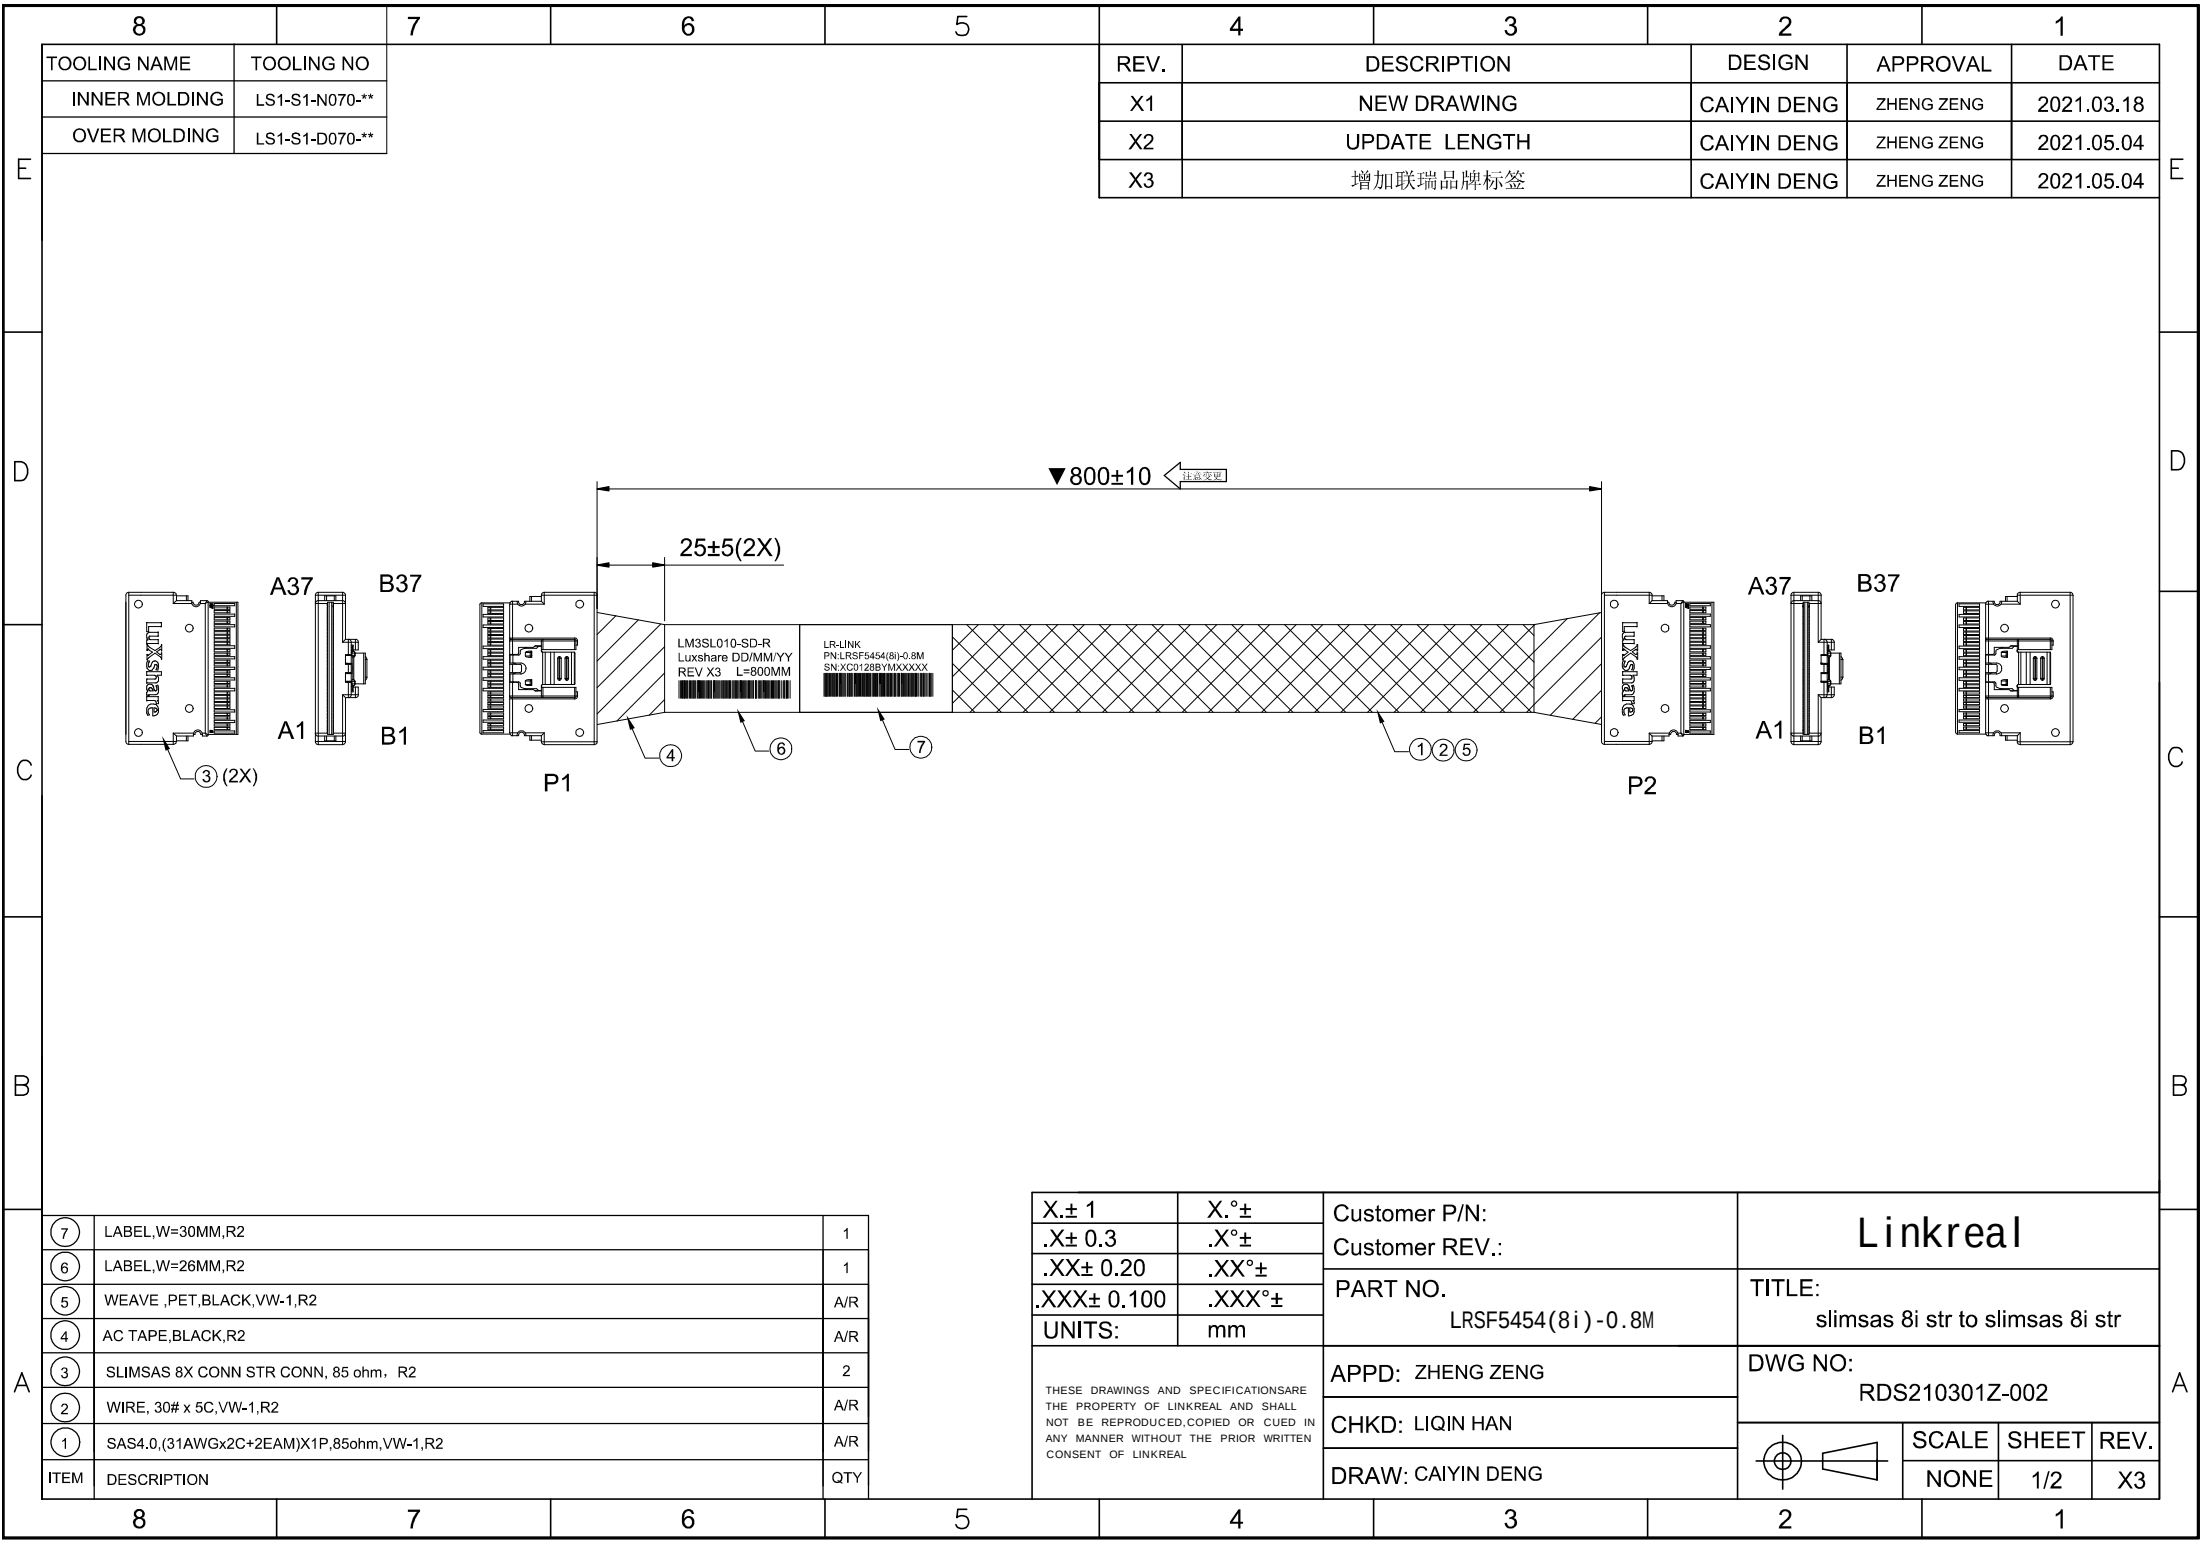

TOOLING NAME	TOOLING NO
INNER MOLDING	LS1-S1-N070-**-
OVER MOLDING	LS1-S1-D070-**-

REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
X1	NEW DRAWING	CAIYIN DENG	ZHENG ZENG	2021.03.18
X2	UPDATE LENGTH	CAIYIN DENG	ZHENG ZENG	2021.05.04
X3	增加联瑞品牌标签	CAIYIN DENG	ZHENG ZENG	2021.05.04

7	LABEL, W=30MM, R2	1
6	LABEL, W=26MM, R2	1
5	WEAVE ,PET, BLACK, VW-1, R2	A/R
4	AC TAPE, BLACK, R2	A/R
3	SLIMSAS 8X CONN STR CONN, 85 ohm, R2	2
2	WIRE, 30# x 5C, VW-1, R2	A/R
1	SAS4.0, (31AWGx2C+2EAM)X1P, 85ohm, VW-1, R2	A/R
ITEM	DESCRIPTION	QTY

X.± 1	X.°±	Customer P/N:	Linkreal		
.X± 0.3	.X°±	Customer REV.:			
.XX± 0.20	.XX°±	PART NO. LRSF5454(8i) -0.8M	TITLE: slimsas 8i str to slimsas 8i str		
.XXX± 0.100	.XXX°±		DWG NO: RDS210301Z-002		
UNITS:	mm	APPD: ZHENG ZENG		SCALE	SHEET
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LINKREAL AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LINKREAL		CHKD: LIQIN HAN		NONE	1/2
		DRAW: CAIYIN DENG			REV. X3

WIRE CONNECTION TABLE

P1→P2

GND	B37	A37	GND
TX7-	B36	A36	RX7-
TX7+	B35	A35	RX7+
GND	B34	A34	GND
TX6-	B33	A33	RX6-
TX6+	B32	A32	RX6+
GND	B31	A31	GND
SIDEBAND	B30	A30	SIDEBAND
SIDEBAND	B29	A29	SIDEBAND
SIDEBAND	B28	A28	SIDEBAND
SIDEBAND	B27	A27	SIDEBAND
SIDEBAND	B26	A26	SIDEBAND
GND	B25	A25	GND
TX5-	B24	A24	RX5-
TX5+	B23	A23	RX5+
GND	B22	A22	GND
TX4-	B21	A21	RX4-
TX4+	B20	A20	RX4+
GND	B19	A19	GND
TX3-	B18	A18	RX3-
TX3+	B17	A17	RX3+
GND	B16	A16	GND
TX2-	B15	A15	RX2-
TX2+	B14	A14	RX2+
GND	B13	A13	GND
SIDEBAND	B12	A12	SIDEBAND
SIDEBAND	B11	A11	SIDEBAND
SIDEBAND	B10	A10	SIDEBAND
SIDEBAND	B9	A9	SIDEBAND
SIDEBAND	B8	A8	SIDEBAND
GND	B7	A7	GND
TX1-	B6	A6	RX1-
TX1+	B5	A5	RX1+
GND	B4	A4	GND
TX0-	B3	A3	RX0-
TX0+	B2	A2	RX0+
GND	B1	A1	GND

P1→P2

GND	A37	B37	GND
RX7-	A36	B36	TX7-
RX7+	A35	B35	TX7+
GND	A34	B34	GND
RX6-	A33	B33	TX6-
RX6+	A32	B32	TX6+
GND	A31	B31	GND
SIDEBAND	A30	B30	SIDEBAND
SIDEBAND	A29	B29	SIDEBAND
SIDEBAND	A28	B28	SIDEBAND
SIDEBAND	A27	B27	SIDEBAND
SIDEBAND	A26	B26	SIDEBAND
GND	A25	B25	GND
RX5-	A24	B24	TX5-
RX5+	A23	B23	TX5+
GND	A22	B22	GND
RX4-	A21	B21	TX4-
RX4+	A20	B20	TX4+
GND	A19	B19	GND
RX3-	A18	B18	TX3-
RX3+	A17	B17	TX3+
GND	A16	B16	GND
RX2-	A15	B15	TX2-
RX2+	A14	B14	TX2+
GND	A13	B13	GND
SIDEBAND	A12	B12	SIDEBAND
SIDEBAND	A11	B11	SIDEBAND
SIDEBAND	A10	B10	SIDEBAND
SIDEBAND	A9	B9	SIDEBAND
SIDEBAND	A8	B8	SIDEBAND
GND	A7	B7	GND
RX1-	A6	B6	TX1-
RX1+	A5	B5	TX1+
GND	A4	B4	GND
RX0-	A3	B3	TX0-
RX0+	A2	B2	TX0+
GND	A1	B1	GND


30

LR-LINK
PN:LRSF5454(8i)-0.8M
SN:XC0128BYMXXXXX

主标签打印参考SAP"联瑞主标签打印模板"
(文档编号1963004015)

- NOTES(说明):
- 1.100% OPEN,SHORT & INTERMITANCE TEST.
(产品必须100%进行断路、短路及间隙性接触测试)
 - 2.HARMFUL MATERIAL AND PROCESS CONTROL ,
PLEASE FOLLOW DOC. NO.QW-Q-043.
(本产品使用原物料及制程必须符合QW-Q-043环境管理物质相关规定)
 - 3.CONDUCTOR RESISTANCE:3 Ohms Max.
(导通阻抗:3 Ohms Max.)
 - 4.INSULATION RESISTANCE:10M Ohms/300V DC,10ms/Min.
(绝缘阻抗: 10M Ohms/300V DC,10ms/Min)
 - 5.HIGH FREQUENCY CHARACTERISTIC PLEASE FOLLOW PCIE 4.0 STANDARD.
(高频特性:符合 PCIE 4.0规范要求)
 - 6.DIFFERENTIAL IMPENDANCE FOR CABLE :85±10ohm;DIFFERENTIAL
IMPENDANCE FOR CONN :85±15ohm;
(成品阻抗: 线材: 85±10 ohm, 含连接器: 85±15 ohm)
 - 7.THE DIMENSIONS MARKED"▼"SHALL BE CHECKED;
(标注"▼"的尺寸必须重点检验)
 - 8.制程工艺参考规范: 文件编号1972000010

所有GND导通

X.± 1	X.°±	Customer P/N:	Linkreal									
.X± 0.3	.X°±	Customer REV.:										
.XX± 0.20	.XX°±	PART NO. LRSF5454(8i) -0.8M	TITLE: slimsas 8i str to slimsas 8i str									
.XXX± 0.100	.XXX°±											
UNITS:	mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LINKREAL AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LINKREAL		DWG NO: RDS210301Z-002								
APPD: ZHENG ZENG				 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>NONE</td><td>2/2</td><td>X3</td></tr></table>			SCALE	SHEET	REV.	NONE	2/2	X3
SCALE	SHEET						REV.					
NONE	2/2						X3					
CHKD: LIQIN HAN												
DRAW: CAIYIN DENG												